

# DMX Dimming - 6-Channel Dimmer

Pathway Connectivity 6-Channel Dimmer



## FEATURES

- 6 DMX controllable variable DC outputs
- Output 5-30VDC (external supply required)
- Asynchronous 300Hz pulse width modulation
- Powerful fade smoothing to 2,000 steps
- RDM support for discovery, remote addressing, and firmware update
- LED display and pushbuttons for configuration
- 2500V DMX input opto isolation
- 250V DMX fault protection
- End-of-line termination switch
- Status LEDs for power, DMX input
- Pluggable screw terminals for all connections
- DMX pass-thru connector
- Snap-on DIN rail housing
- DIN rail mounting section included

## MODEL DESCRIPTION


1008 eDIN 6 channel DC Driver

## SPECIFICATIONS

Output Rating 5A at 30VDC  
 Power Supply: 9-30V AC or DC, 5W supply required. Use eDIN1001 power supply or equal.  
 Isolation  
 • 2500V opto isolation  
 • 250V fault protection  
 Size 3.5" x 8" x 1.25" (90mm x 200mm x 30mm)  
 Mounting 35mm x 7.5mm DIN rail (included)

## ACCESSORIES

1001 eDIN standard 10W power supply  
 1102-30 Additional 30cm (12") section of DIN rail  
 1103 eDIN Rack Mount Panel Kit (2RU)

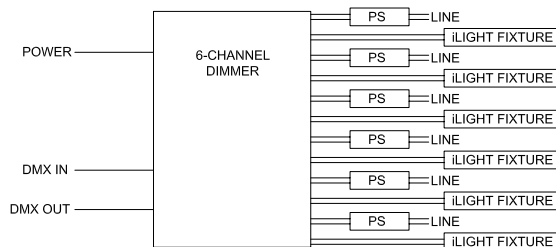

All eDIN devices can be mounted in eDIN enclosures

## ORDERING INFORMATION

Ordering Number: 65-CTR01-001-00 6-Channel Dimmer  
 65-PWR01-001-00 Pathway Power Supply

### Applications

- Dim Plexineon with DMX system

Specification sheets are subject to change without notice. For the most recent version, please refer to [www.ilight-tech.com](http://www.ilight-tech.com).

### Product Application

Plexineon