

# Outdoor Power Supplies - 240V

## TECHNICAL INFORMATION


### Outdoor Power Supplies: 240V

#### Features

- Input: 240 VAC 50-60Hz maximum current 0.50A
- Output: 24VDC 4AMax regulated inherently limited Class 2 power unit
- RU listed for the U.S.\*
- Model is enclosed in NEMA 3R enclosure
- Dimensions: 11.25" (296mm) x 3.25" (83mm) x 3.36 (85mm)
- Manual reset overload protection
- Manufacturer's warranty of 3 years
- Includes power cord set

\*RU is a recognized component covered under UL's recognition service. Final acceptance of the component is dependent upon its installation. For more information about Recognized Components, visit UL's Website at <http://www.ul.com/about/glossary.html>.

Description	Input		Output			Case Temp Max (°C)	Weight (Grams)
	Volts (V)	Current Max (A)	Power Max (W)	Voltage Norm (V)	Current Max (A)		
240VAC	240	0.50	96.0	24.0 +/-0.3	4.0 +/-0.25	80	3175

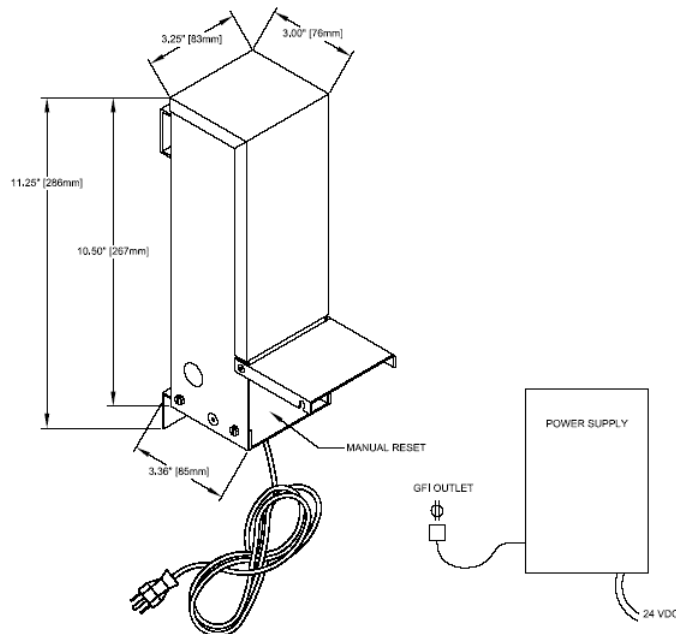

## ORDERING INFORMATION

Order Number: PN10124DCR-240-3R

Specification sheets are subject to change without notice. For the most recent version, please refer to [www.ilight-tech.com](http://www.ilight-tech.com).

Product Application

Plexineon &  
Hypnotica iS