

Outdoor Power Supplies - 120V

TECHNICAL INFORMATION


Outdoor Power Supplies: 120V

Features

- Input: 120VAC 50-60Hz maximum current 1A
- Output: 24VDC 4A Max regulated inherently limited Class 2 power unit
- RU listed for the U.S.*
- Model is enclosed in NEMA 3R enclosure
- Dimensions: 11.25" (296mm) x 3.25" (83mm) x 3.36 (85mm)
- Manual reset overload protection
- Manufacturer's warranty of 3 years
- Includes power cord set

*RU is a recognized component covered under UL's recognition service. Final acceptance of the component is dependent upon its installation. For more information about Recognized Components, visit UL's Website at <http://www.ul.com/about/glossary.html>.

| Description | Input | | Output | | | Case Temp Max (°C) | Weight (Grams) |
|-------------|-----------|-----------------|---------------|------------------|-----------------|--------------------|----------------|
| | Volts (V) | Current Max (A) | Power Max (W) | Voltage Norm (V) | Current Max (A) | | |
| 120VAC | 120 | 1.0 | 96.0 | 24.0 +/-0.3 | 4.0 +/-0.25 | 80 | 3175 |

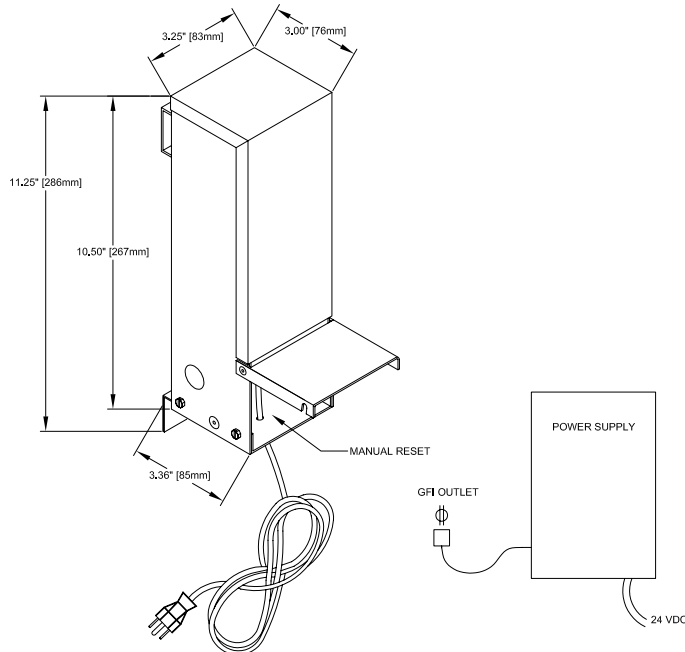

ORDERING INFORMATION

Order Number: PN10124DCR-3R

Product Application

Plexineon &
Hypnotica iS

Specification sheets are subject to change without notice. For the most recent version, please refer to www.ilight-tech.com.