

Outdoor Power Supplies 120V 3-Outlet

TECHNICAL INFORMATION


120V 3-Outlet Outdoor Power Supplies

Features

- Input: 120VAC 60Hz maximum current 3A
- Output: 24VDC 4AMax X 3 outputs regulated inherently limited Class 2 power unit
- RU listed for the U.S.*
- Model is enclosed in NEMA 3R enclosure
- Dimensions: 14.25" (362mm) x 8.5" (216mm) x 4.5" (114mm)
- Manual reset overload protection
- Manufacturer's warranty of 3 years
- Includes power cord set

*RU is a recognized component covered under UL's recognition service. Final acceptance of the component is dependent upon its installation. For more information about Recognized Components, visit UL's Website at <http://www.ul.com/about/glossary.html>.

Description	Input		Output			Case Temp Max (°C)	Weight (Grams)
	Volts (V)	Current Max (A)	Power Max (W)	Voltage Norm (V)	Current Max (A)		
120VAC	120	3.0	96.0	24.0 +/-0.3	4.0 +/-0.25	80	9071

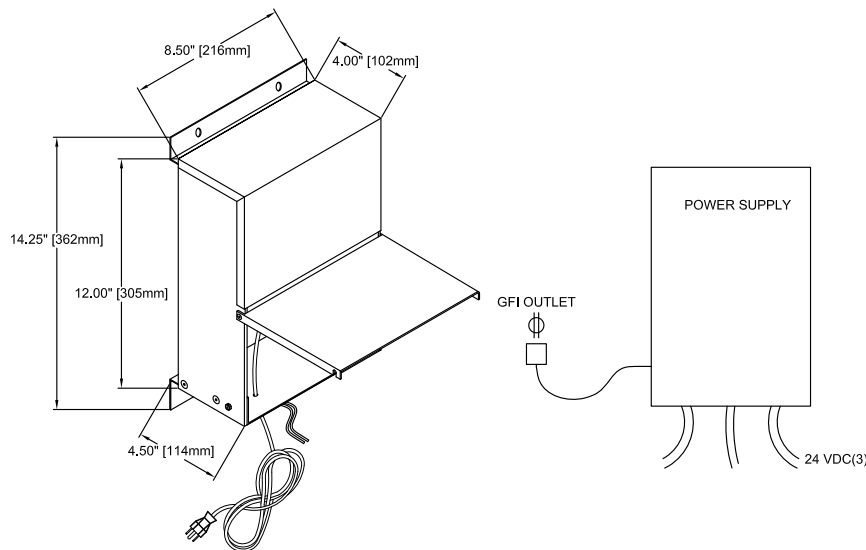

ORDERING INFORMATION

Order Number: PNC224024DCR-3R

Product Application

Plexineon &
Hypnotica iS

Specification sheets are subject to change without notice. For the most recent version, please refer to www.ilight-tech.com.