


PLEXINEON[®] 120V POWER SUPPLIES


iLight Model # PN10124DCR

- Input: 120VAC 60Hz 1.08A corded (5-foot power cord)
- Output: 24VDC 4AMax regulated inherently limited class 2 power unit (bullet connector on output)
- UL listed for U.S. and Canada
- Model is marked “DRY LOCATION USE ONLY”
- To be placed outside it must be mounted in a NEMA class 3R enclosure
- Dimensions: 8” x 3 3/8” x 3 3/8”
- Manufacturer’s warranty of three years.
- Expected life span is between three and ten years.

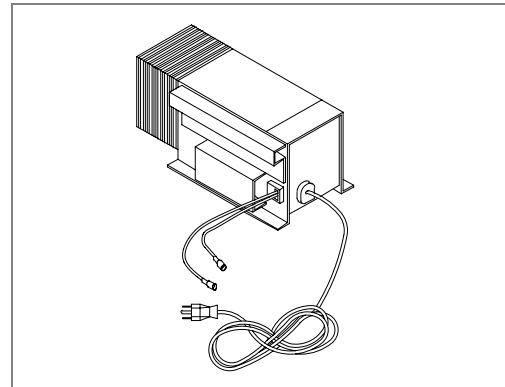

iLight Model # PN10124DCR-3R

- Input: 120VAC 60Hz 1.08A
- Output: 24VDC 4AMax regulated inherently limited class 2 power unit
- UL listed for U.S. and Canada
- Model is enclosed in NEMA 3R enclosure
- Dimensions: 11 1/4” x 4” x 4 1/4”
- Manufacturer’s warranty of three years.
- Expected life span is between three and ten years.

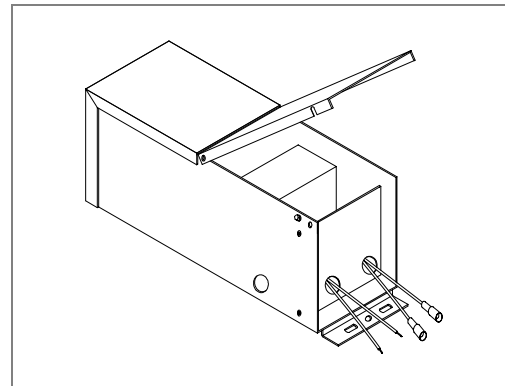

iLight Model # PNC224024DCR-3R

- Input: 120VAC 60Hz 2A
- Outputs: 24 VDC 4AMax X 3 outputs, regulated inherently limited class 2 power unit
- UL listed for U.S. and Canada
- Model is enclosed in NEMA 3R enclosure
- Dimensions: 14” X 8.5” X 4.5”
- Manufacturer’s warranty of three years.
- Expected life span is between three and ten years.

